

FIG. 1

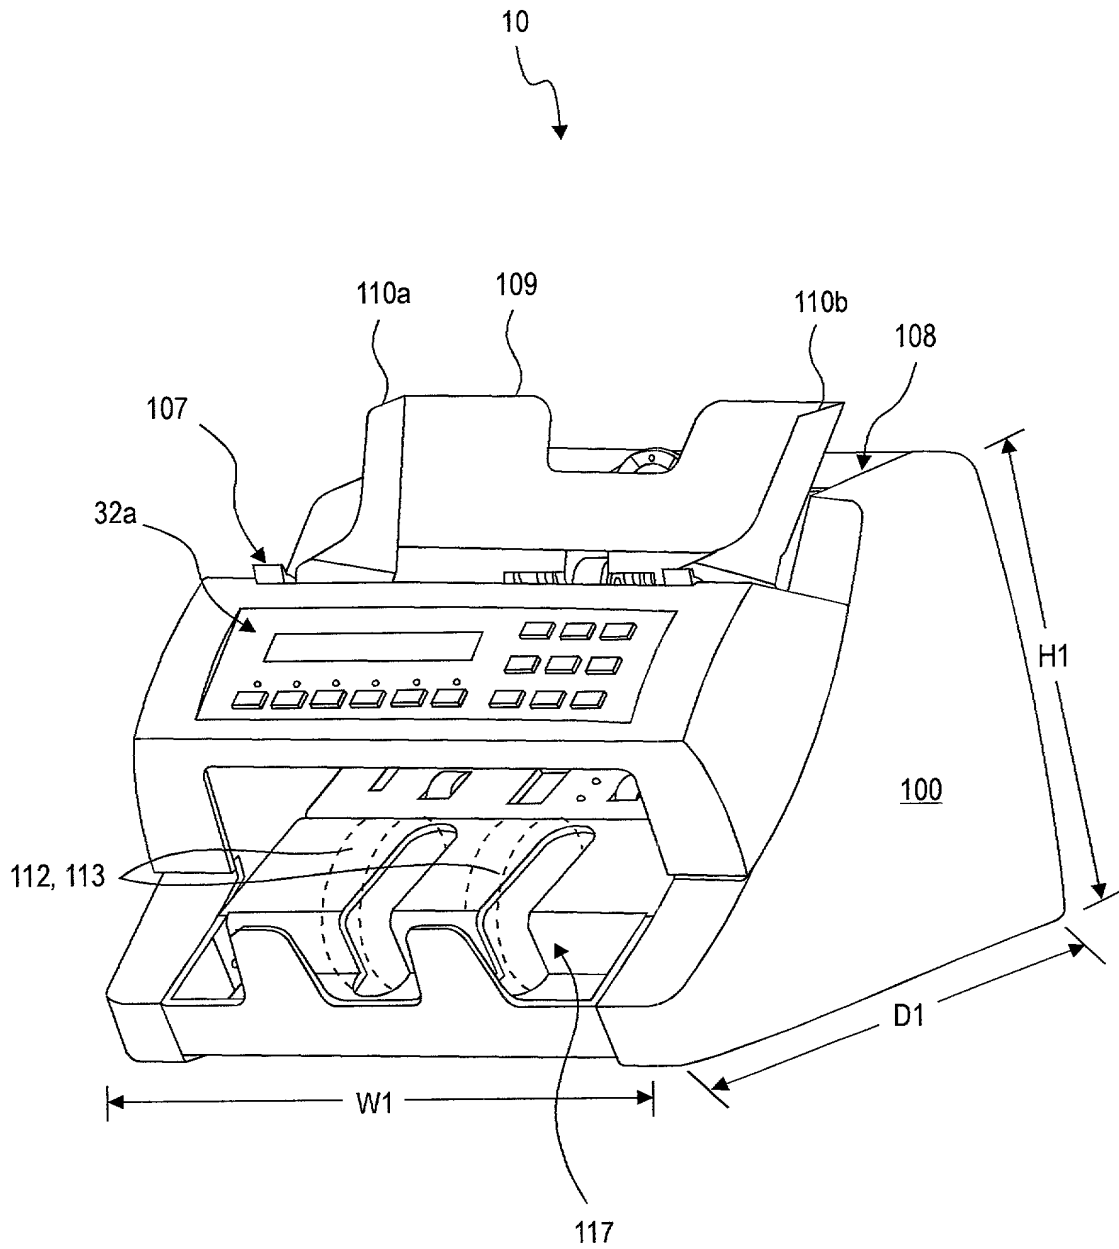
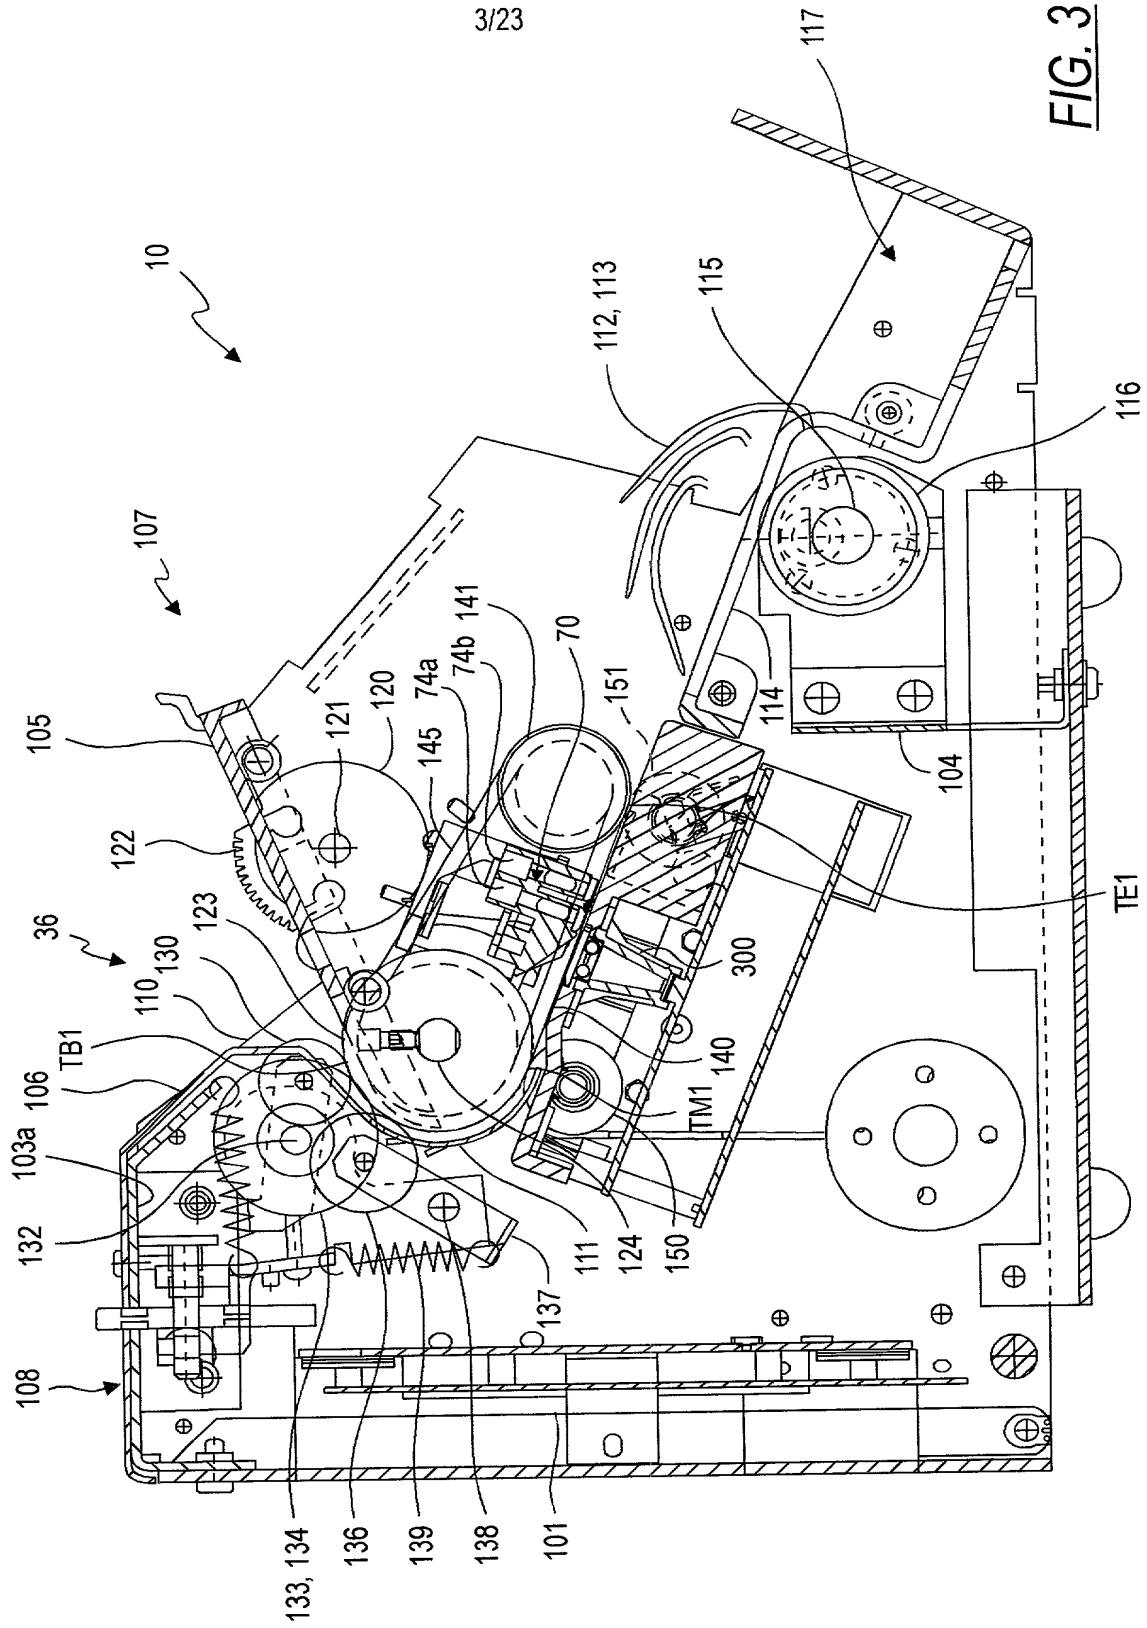


FIG. 2

FIG. 3



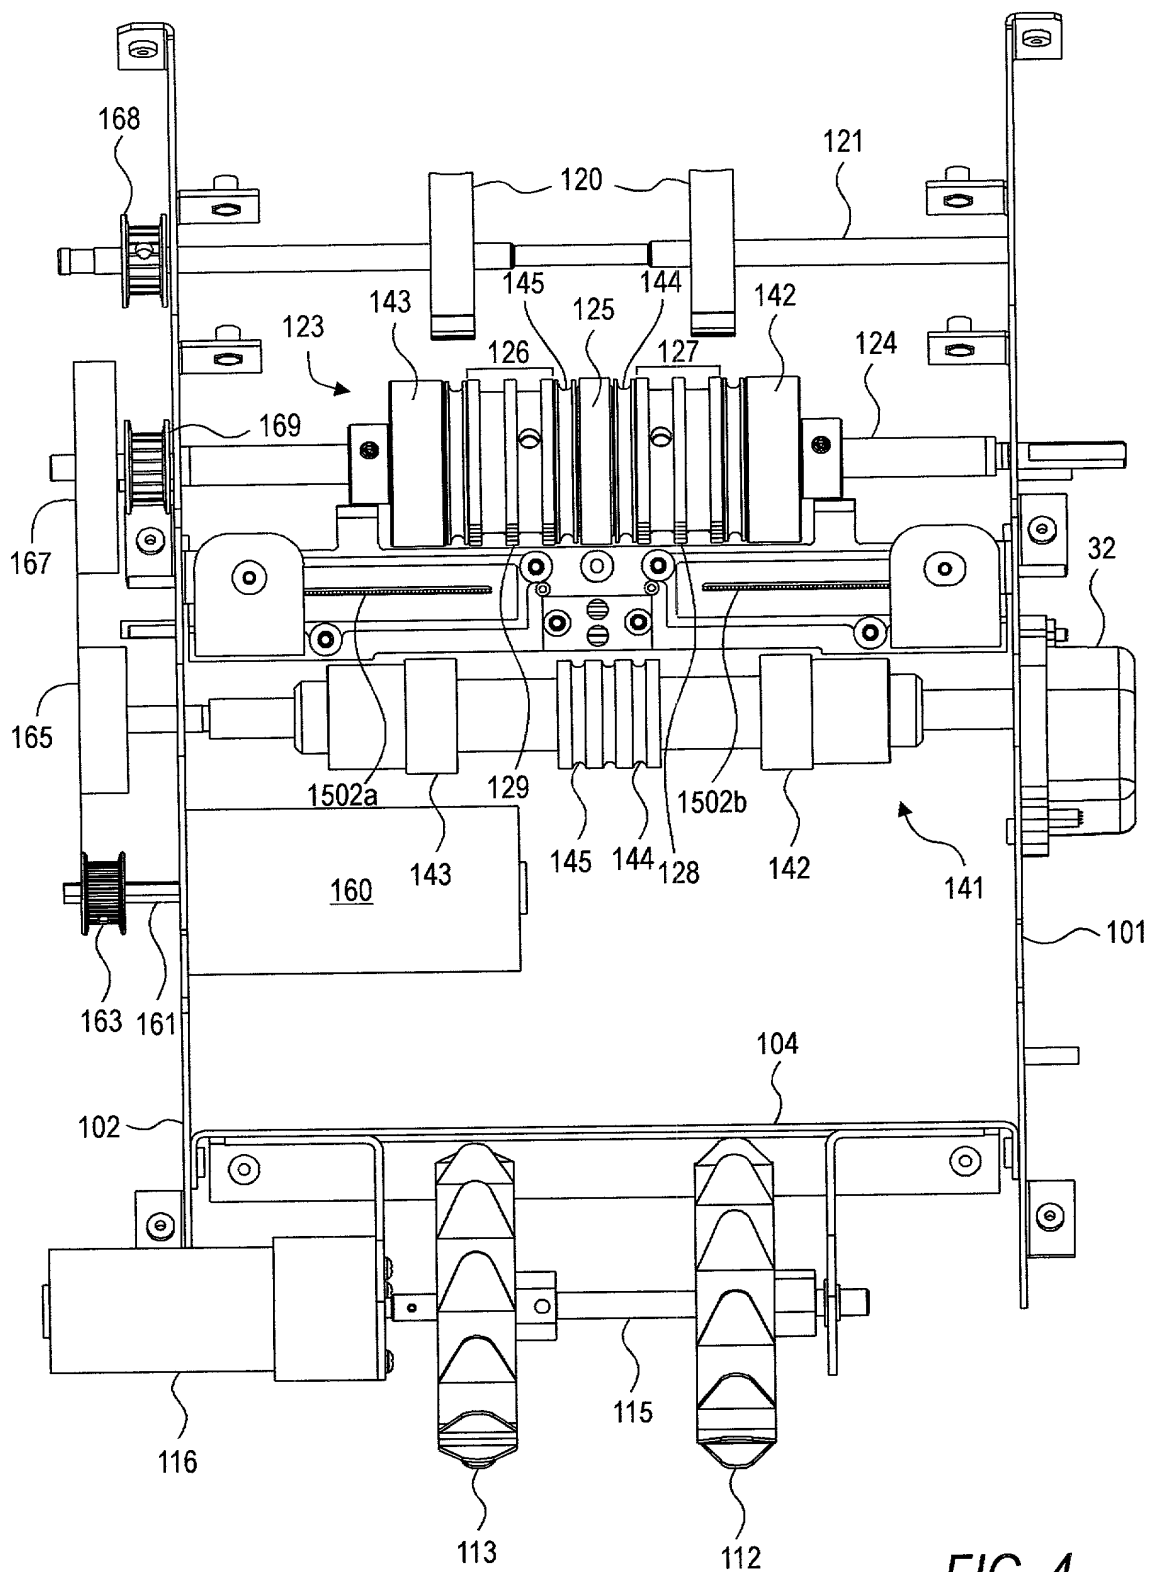


FIG. 4

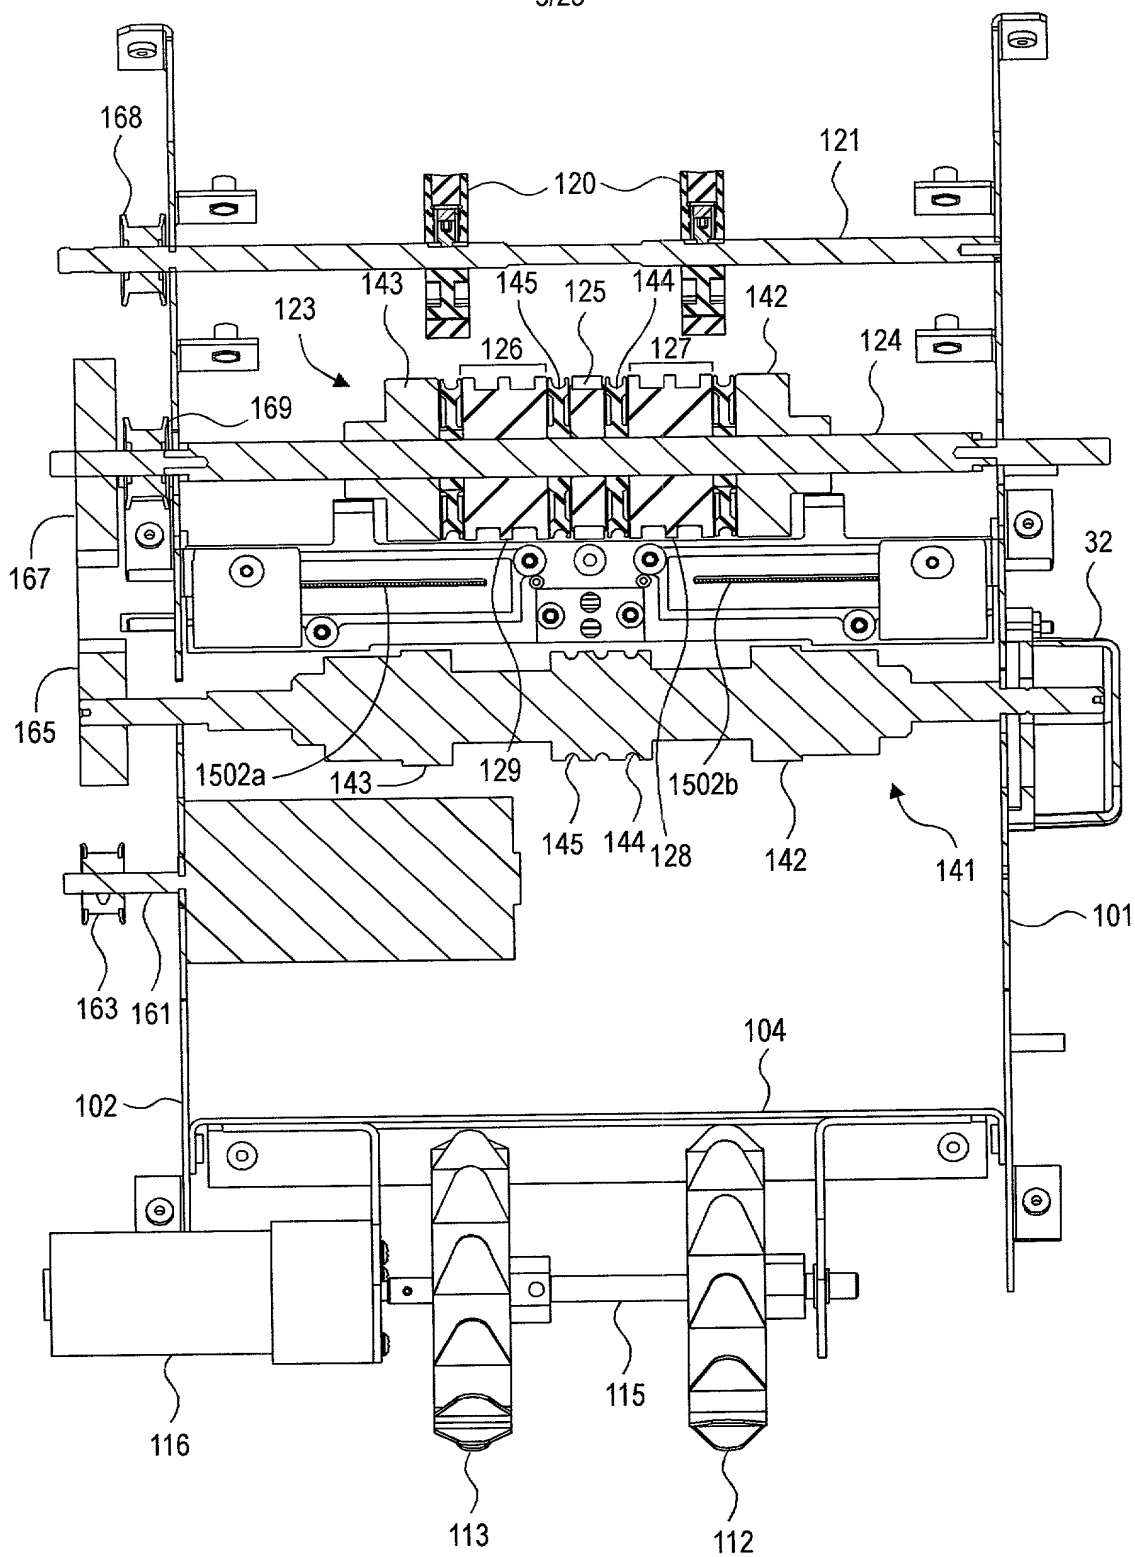


FIG. 5

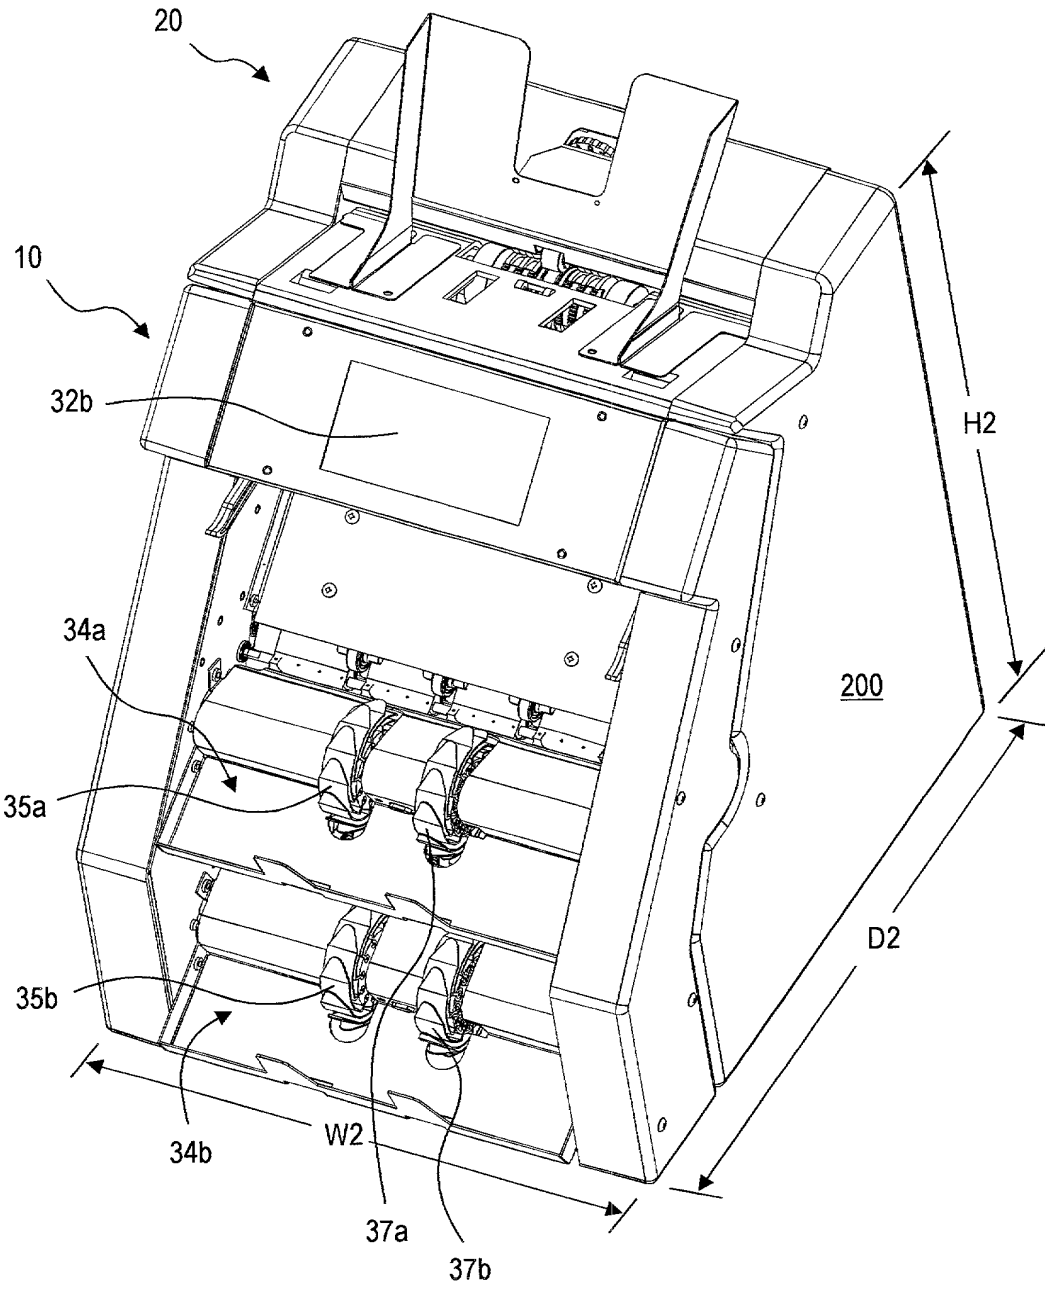


FIG. 6

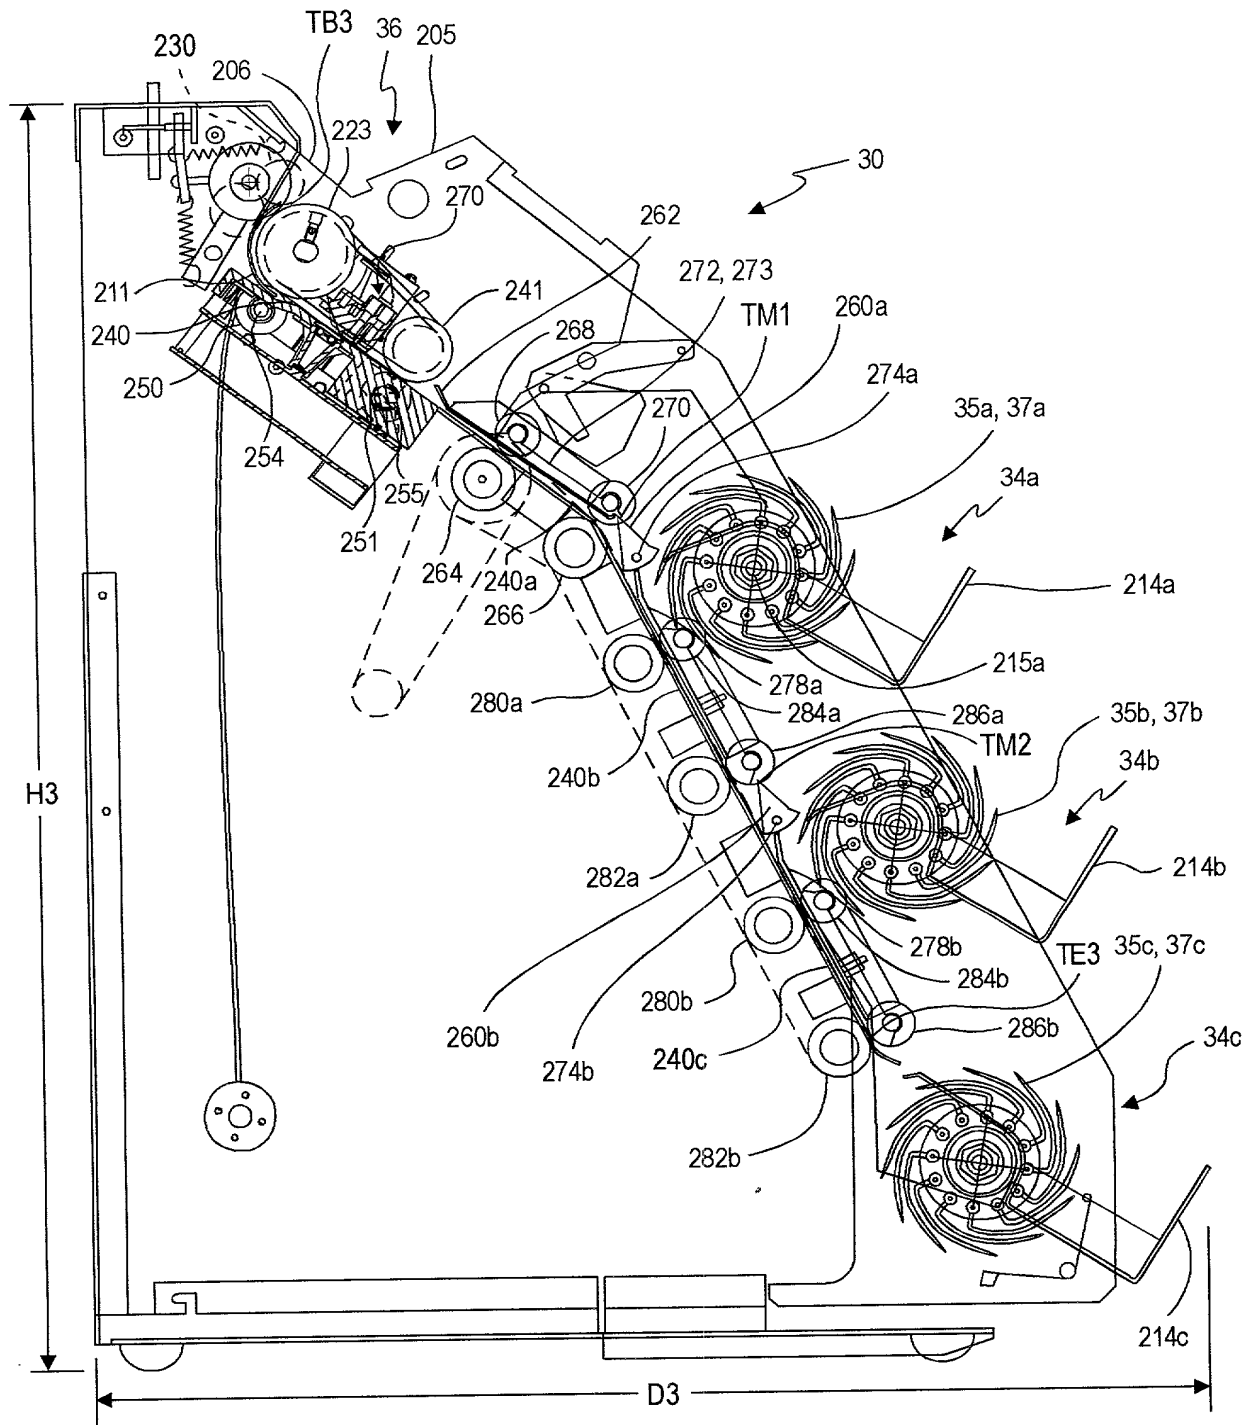


FIG. 8

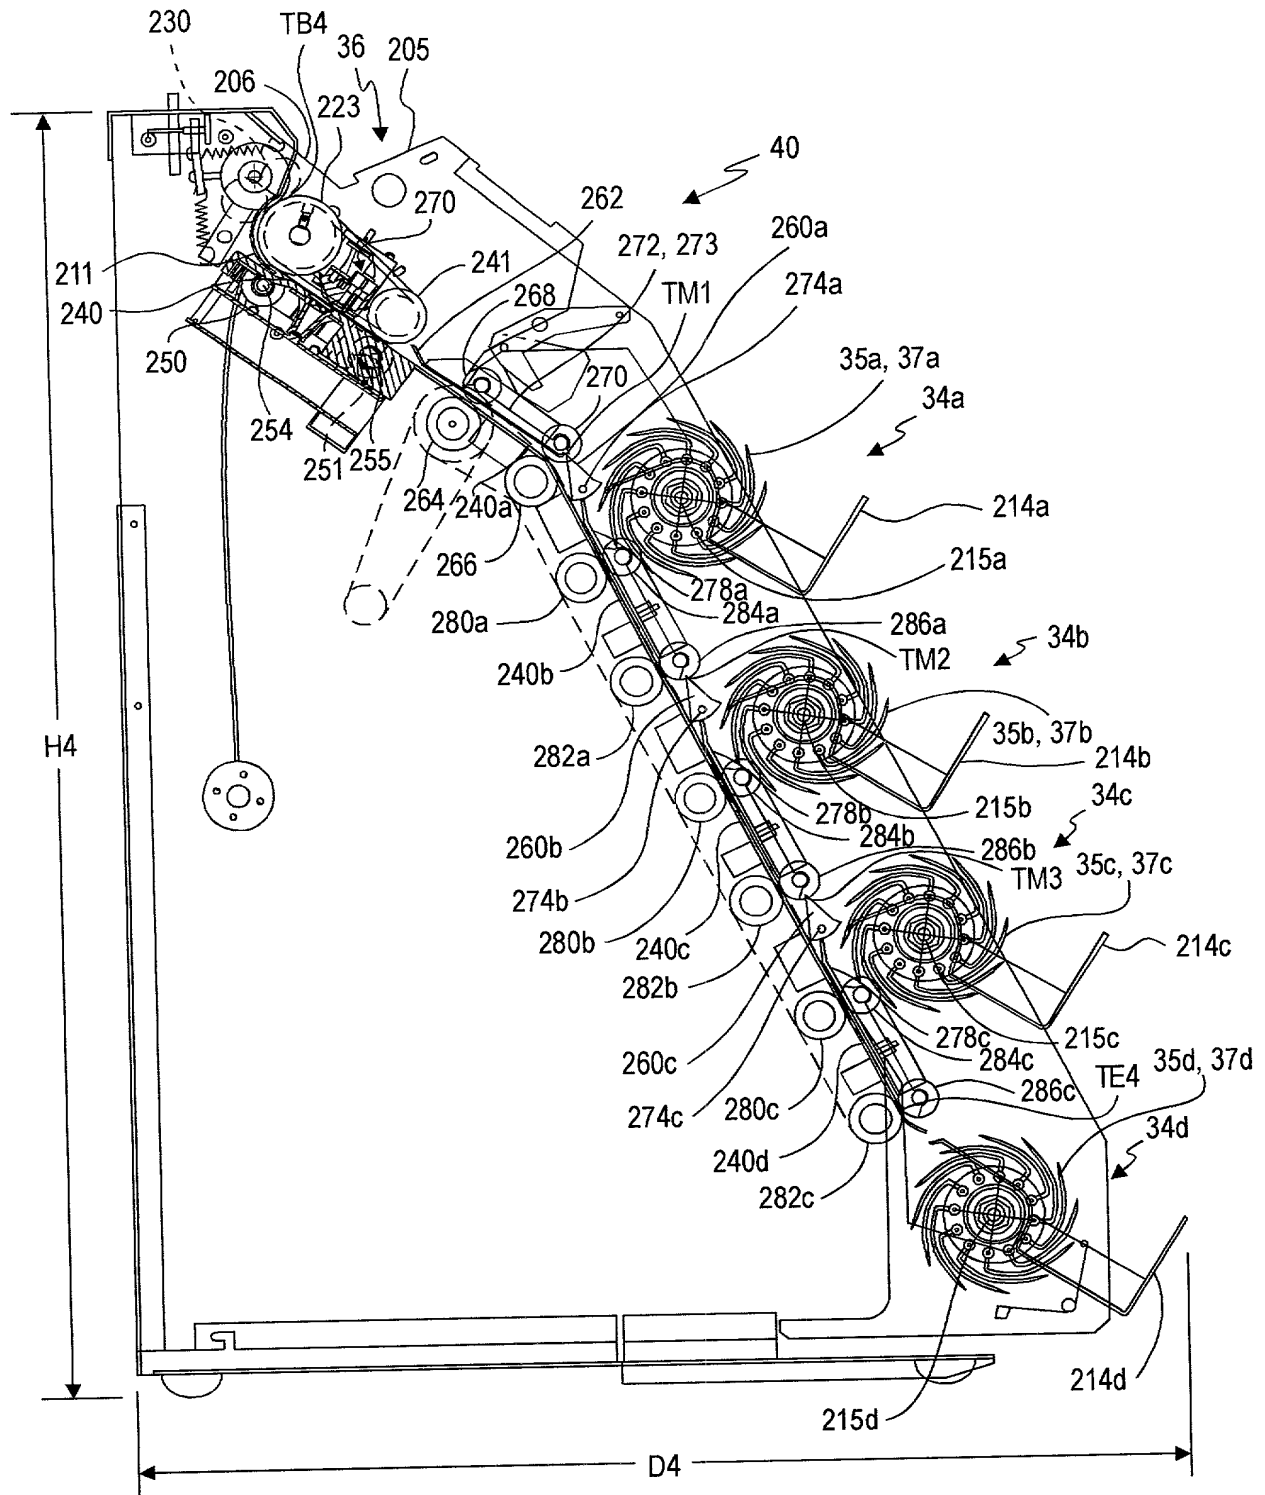
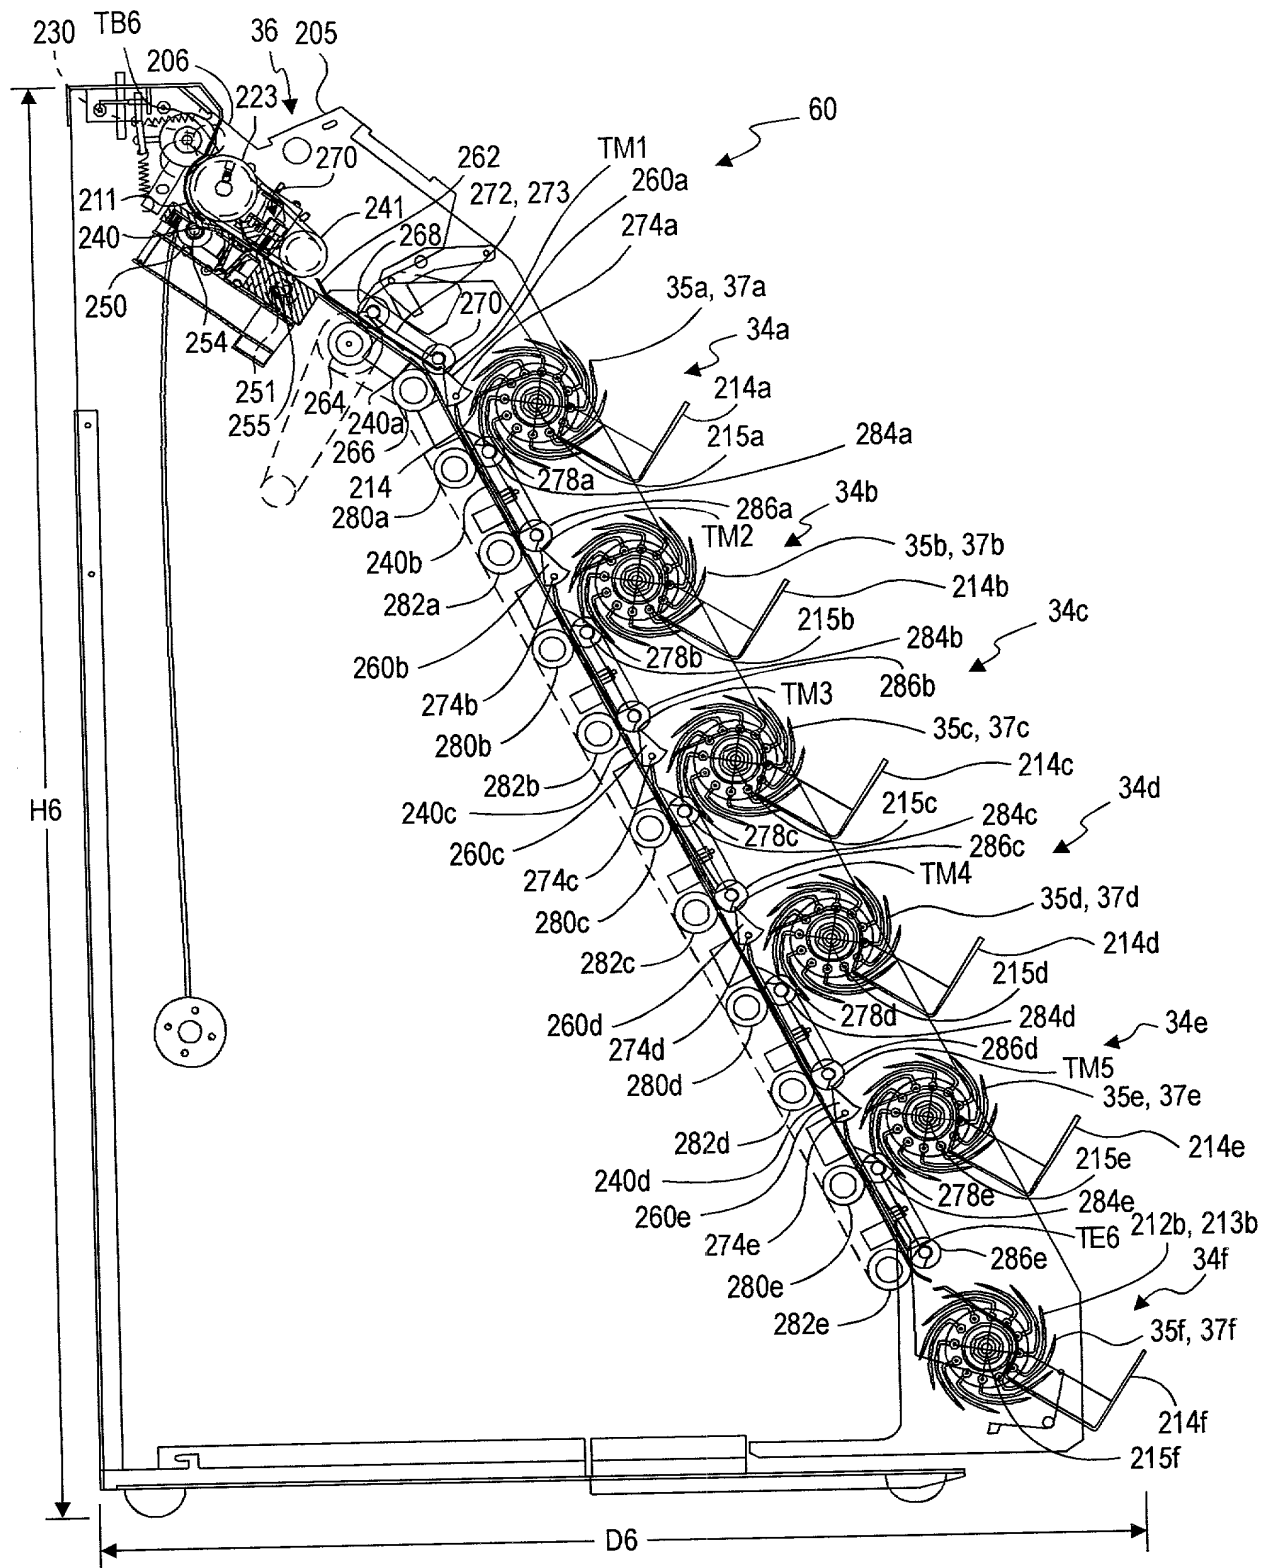


FIG. 9



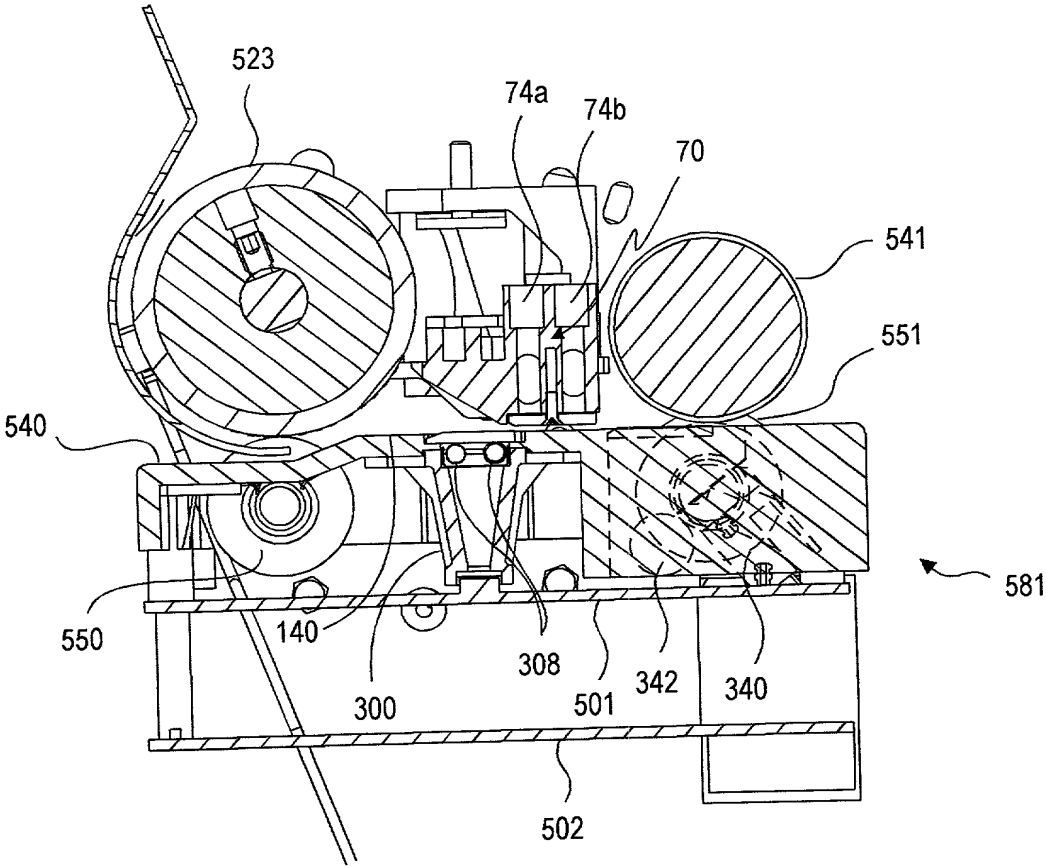


FIG. 11

12/23

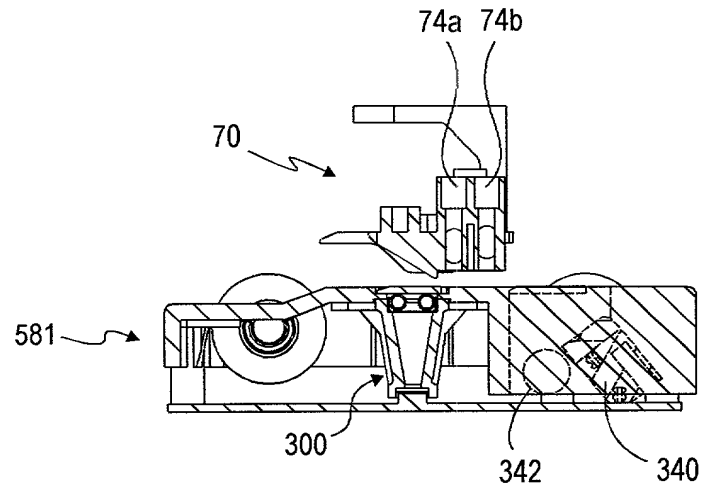


FIG. 12

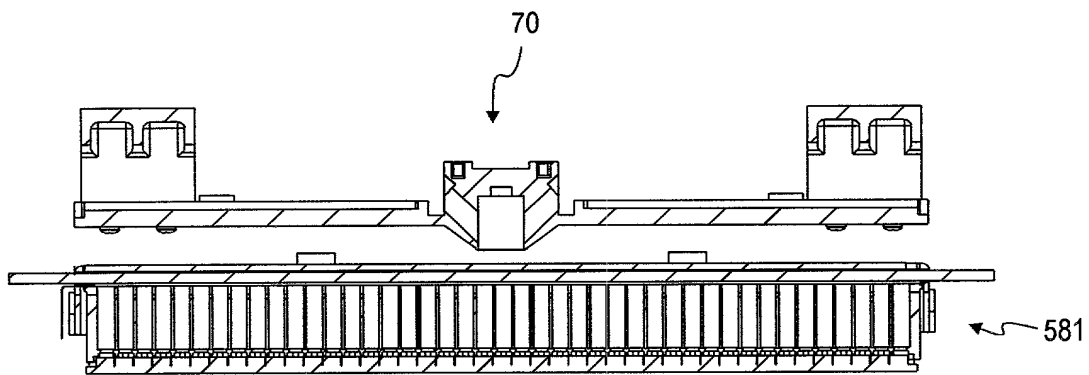


FIG. 13

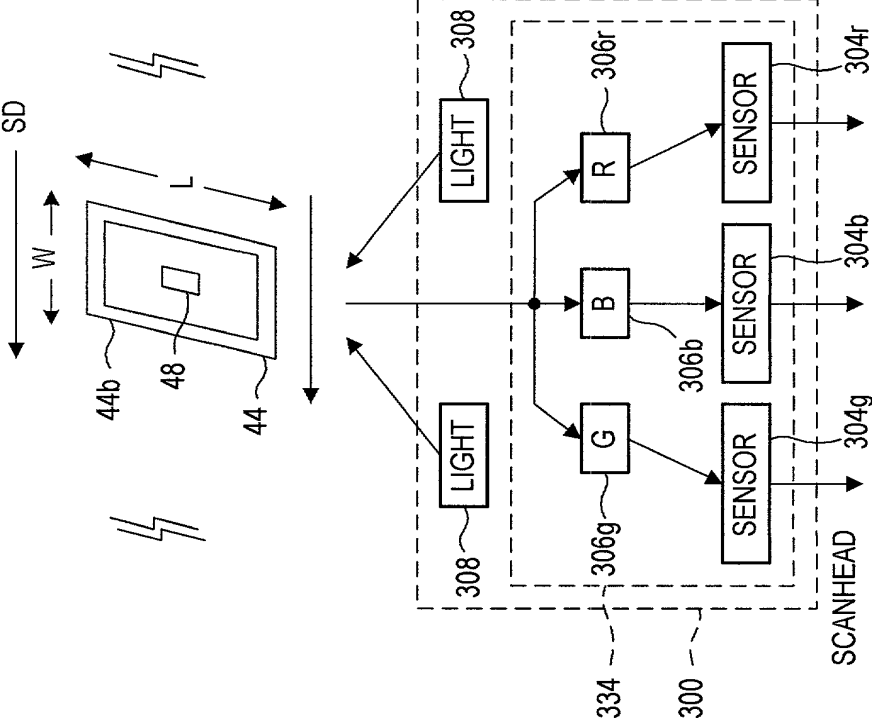


FIG. 15

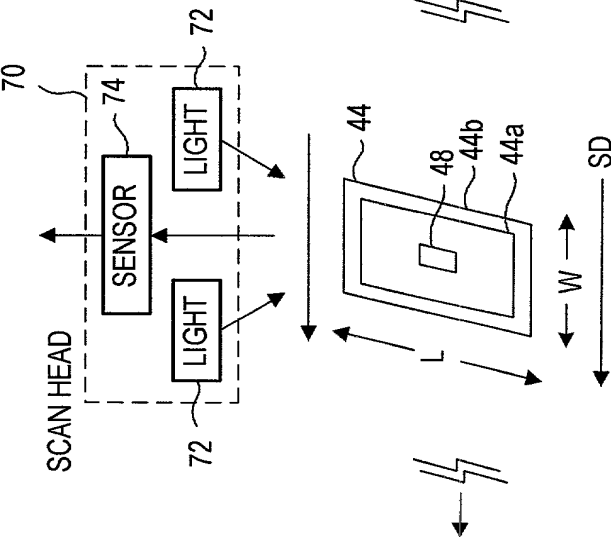


FIG. 14

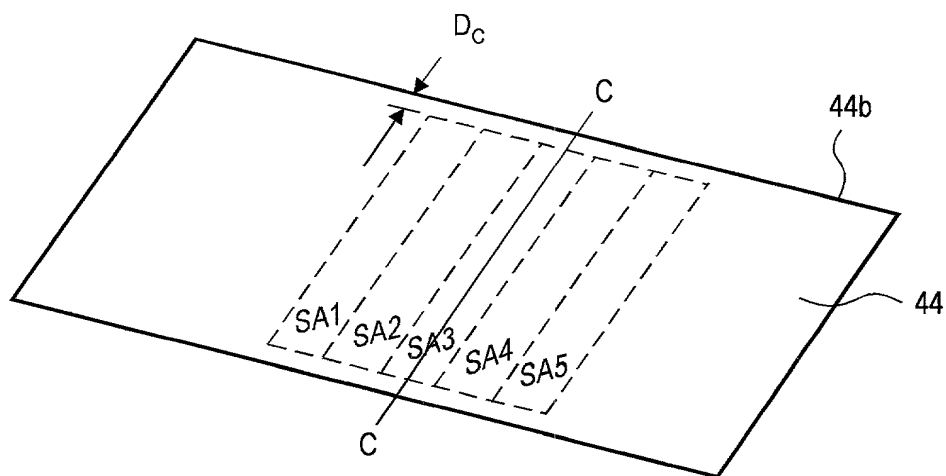


FIG. 16

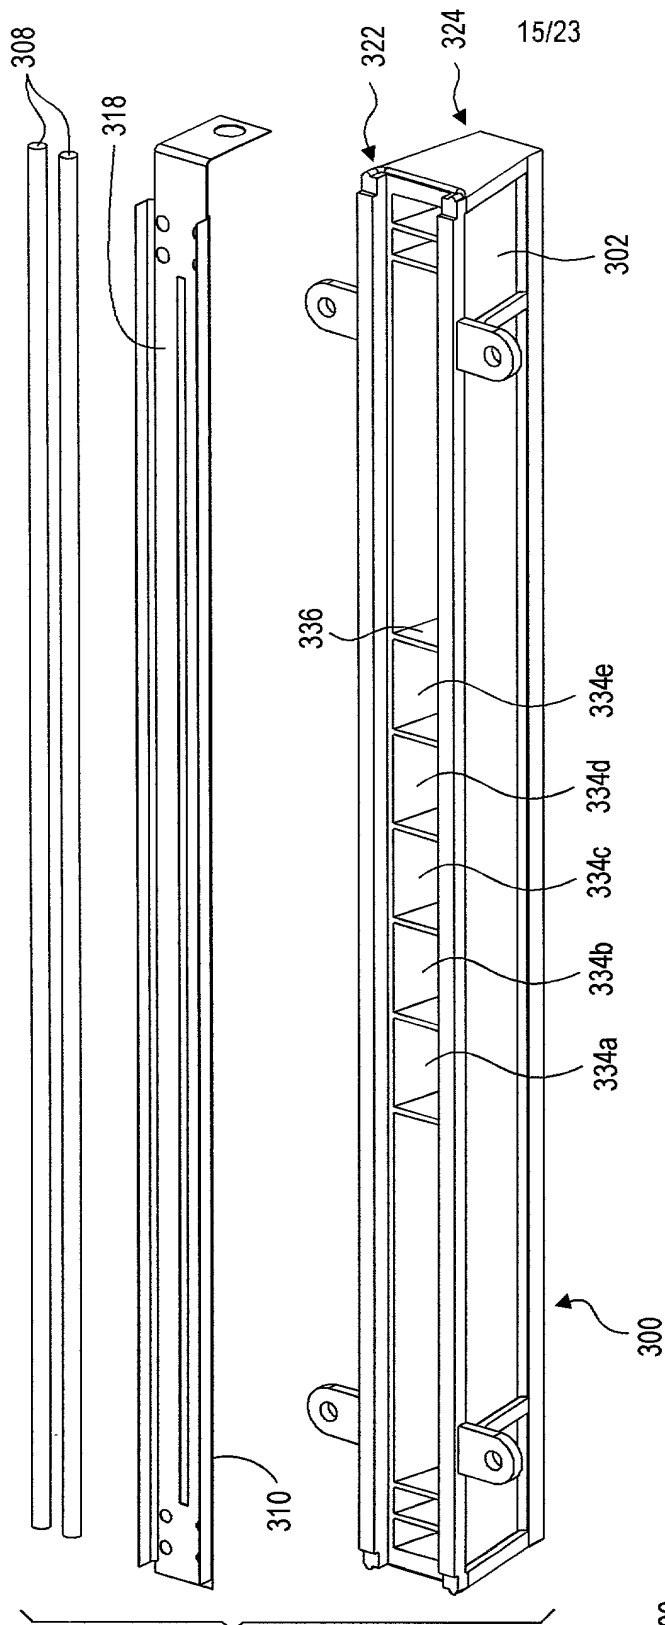


FIG. 17

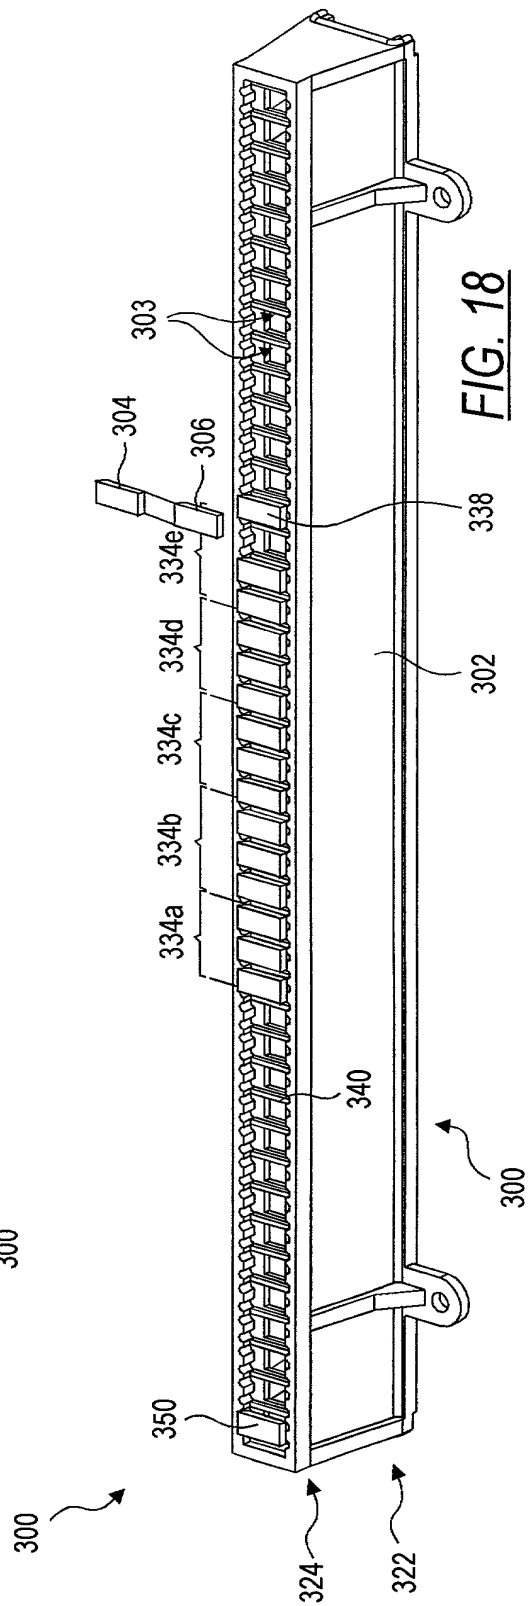
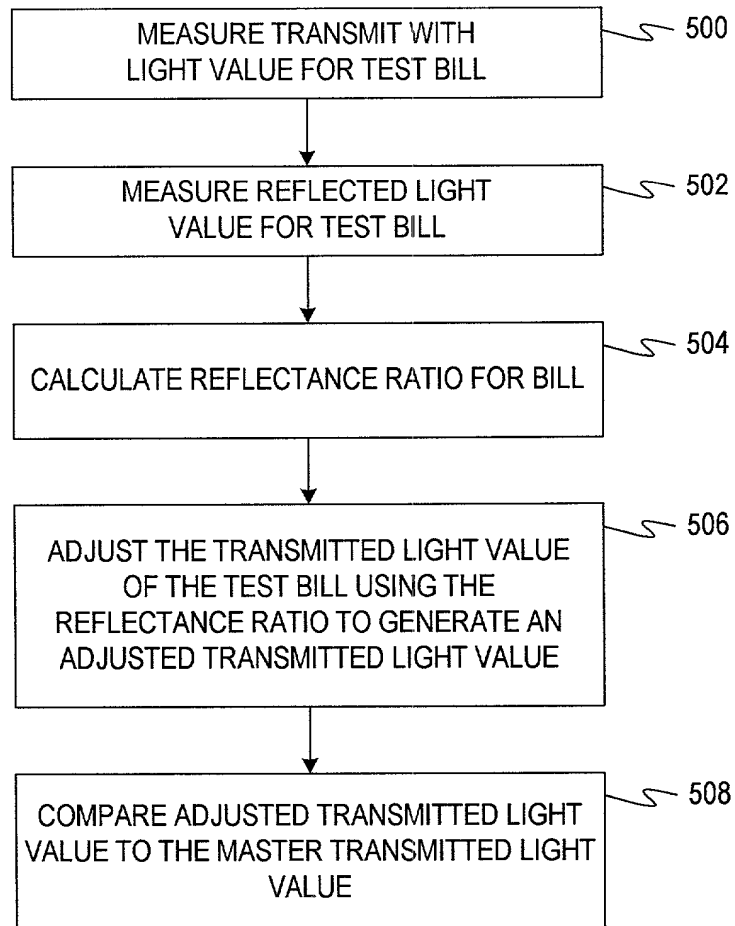


FIG. 18

FIG. 19

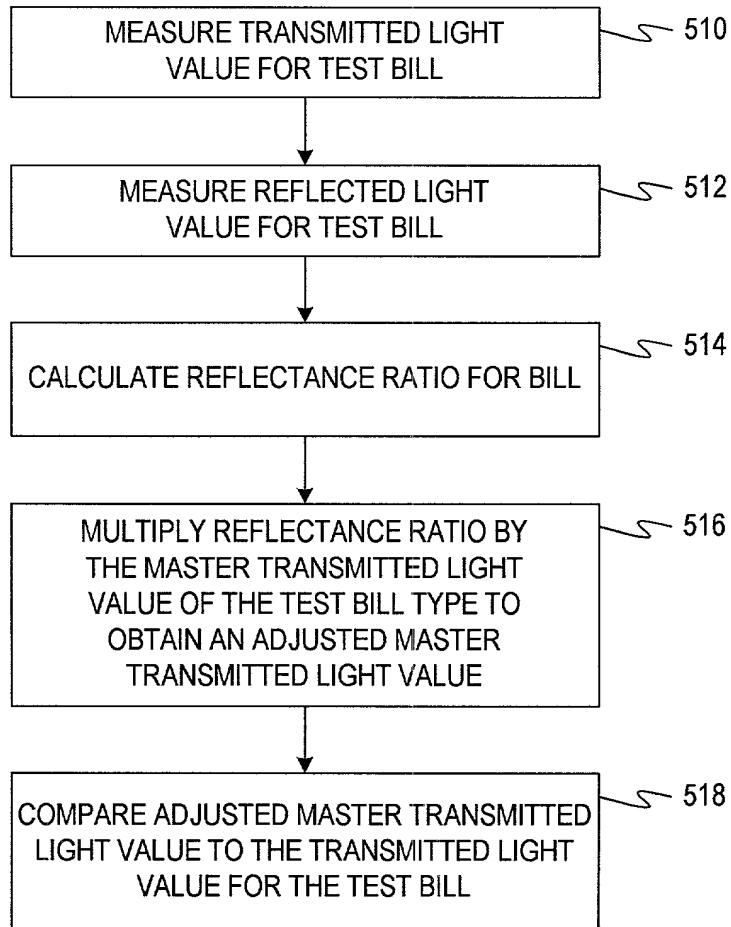
FIG. 20

FIG. 21 is a perspective view of the device 70, showing the front panel 18/23 and the rear panel 19/24. The device 70 is a rectangular unit with a front panel 18/23 and a rear panel 19/24. The front panel 18/23 features a central display area 20/25 and a control panel 21/26. The rear panel 19/24 includes a power input port 22/27 and a ventilation grille 23/28. The device 70 is shown in a perspective view, highlighting its three-dimensional structure and the arrangement of its components.

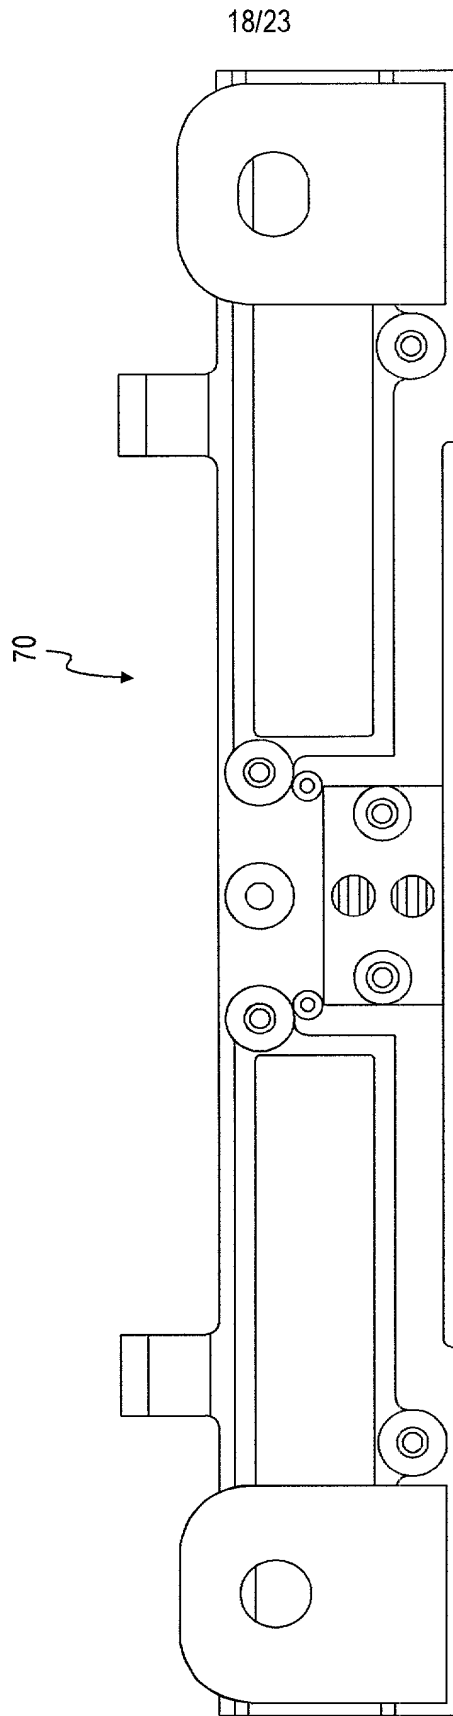


FIG. 21

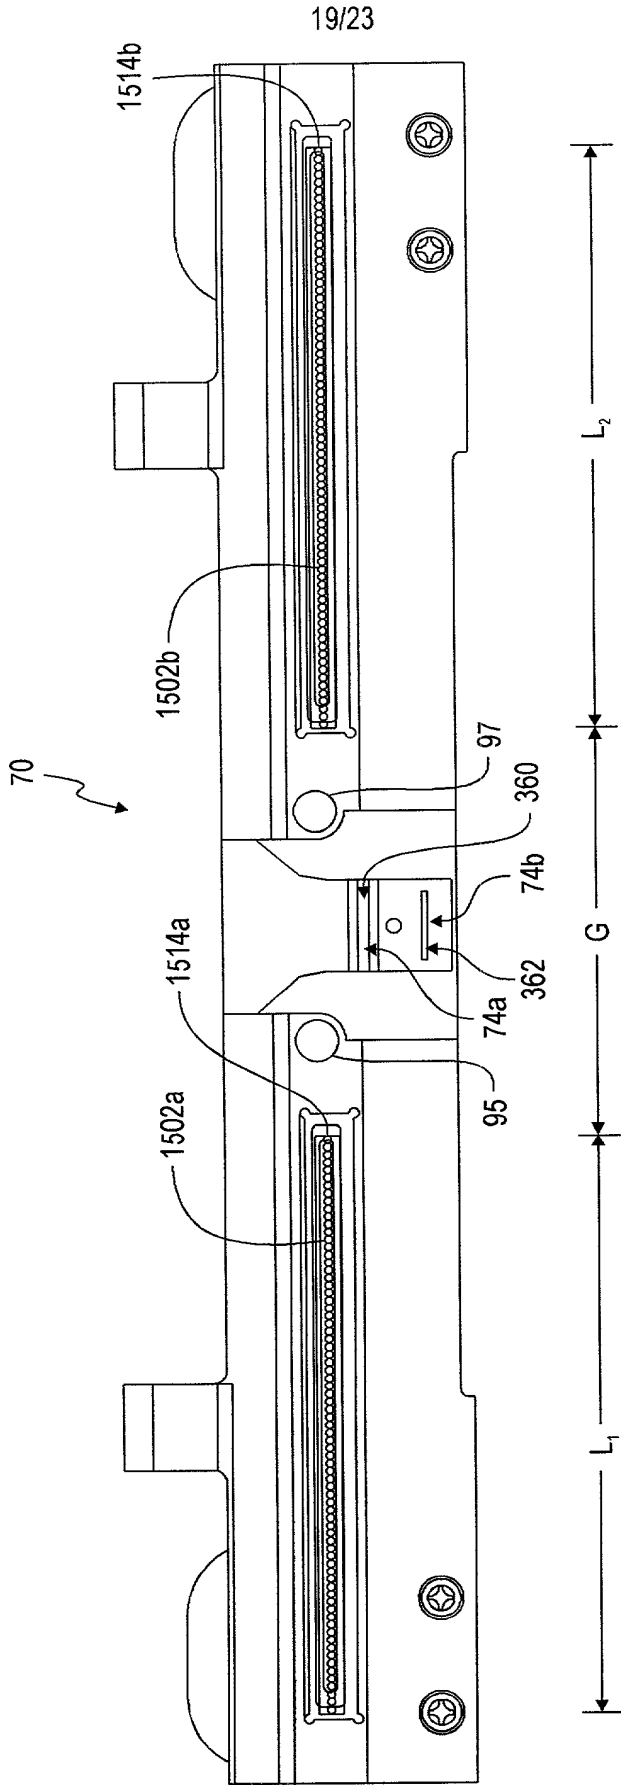
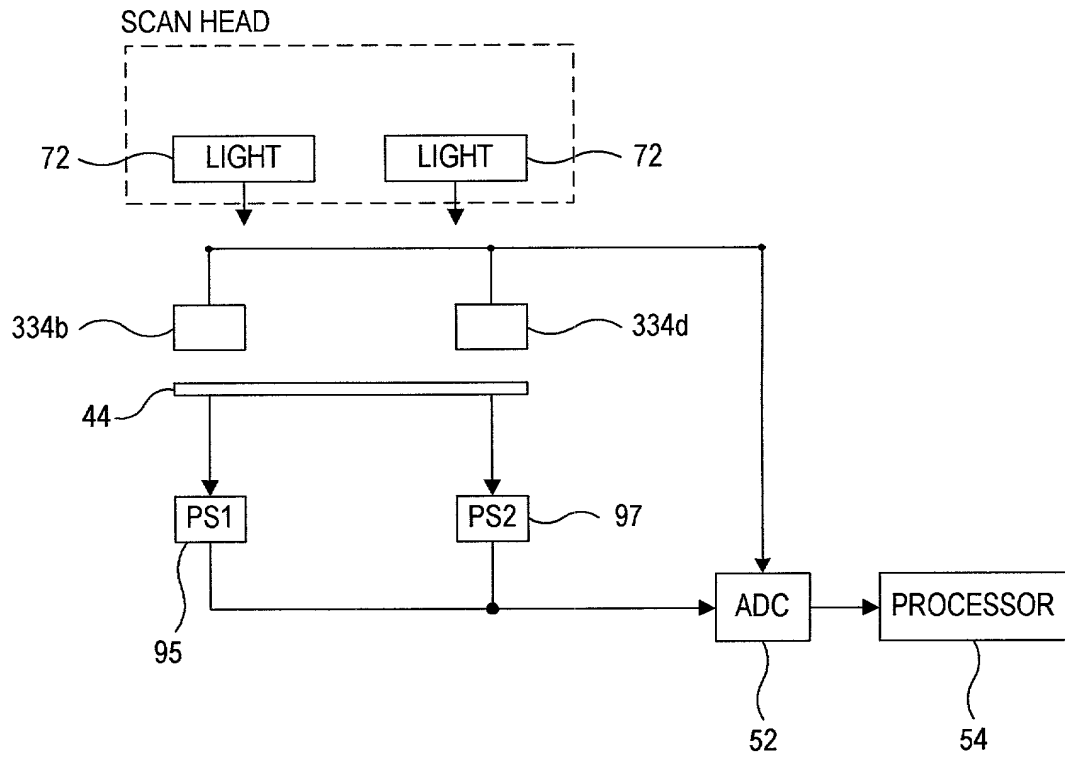


FIG 22

FIG. 23

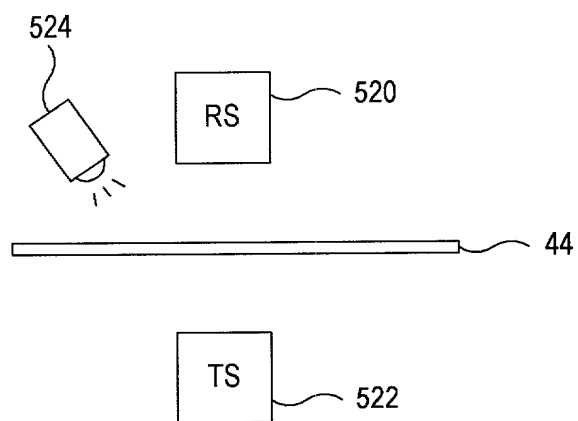


FIG. 24

22/23

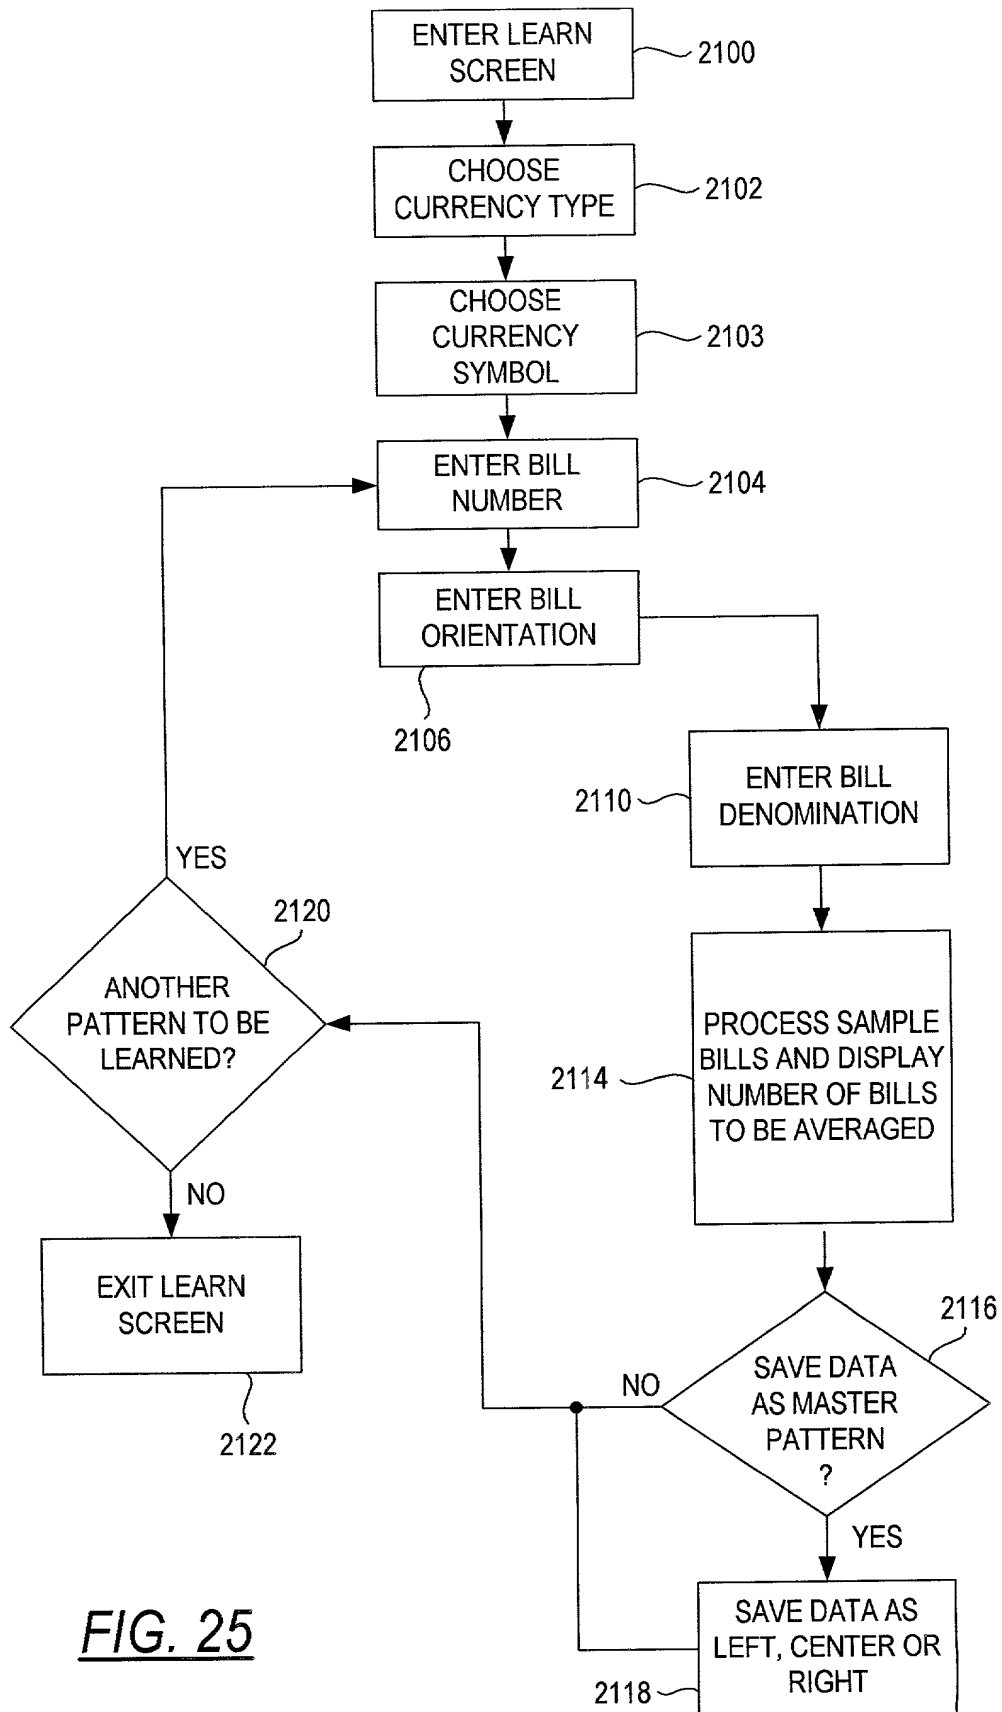


FIG. 25

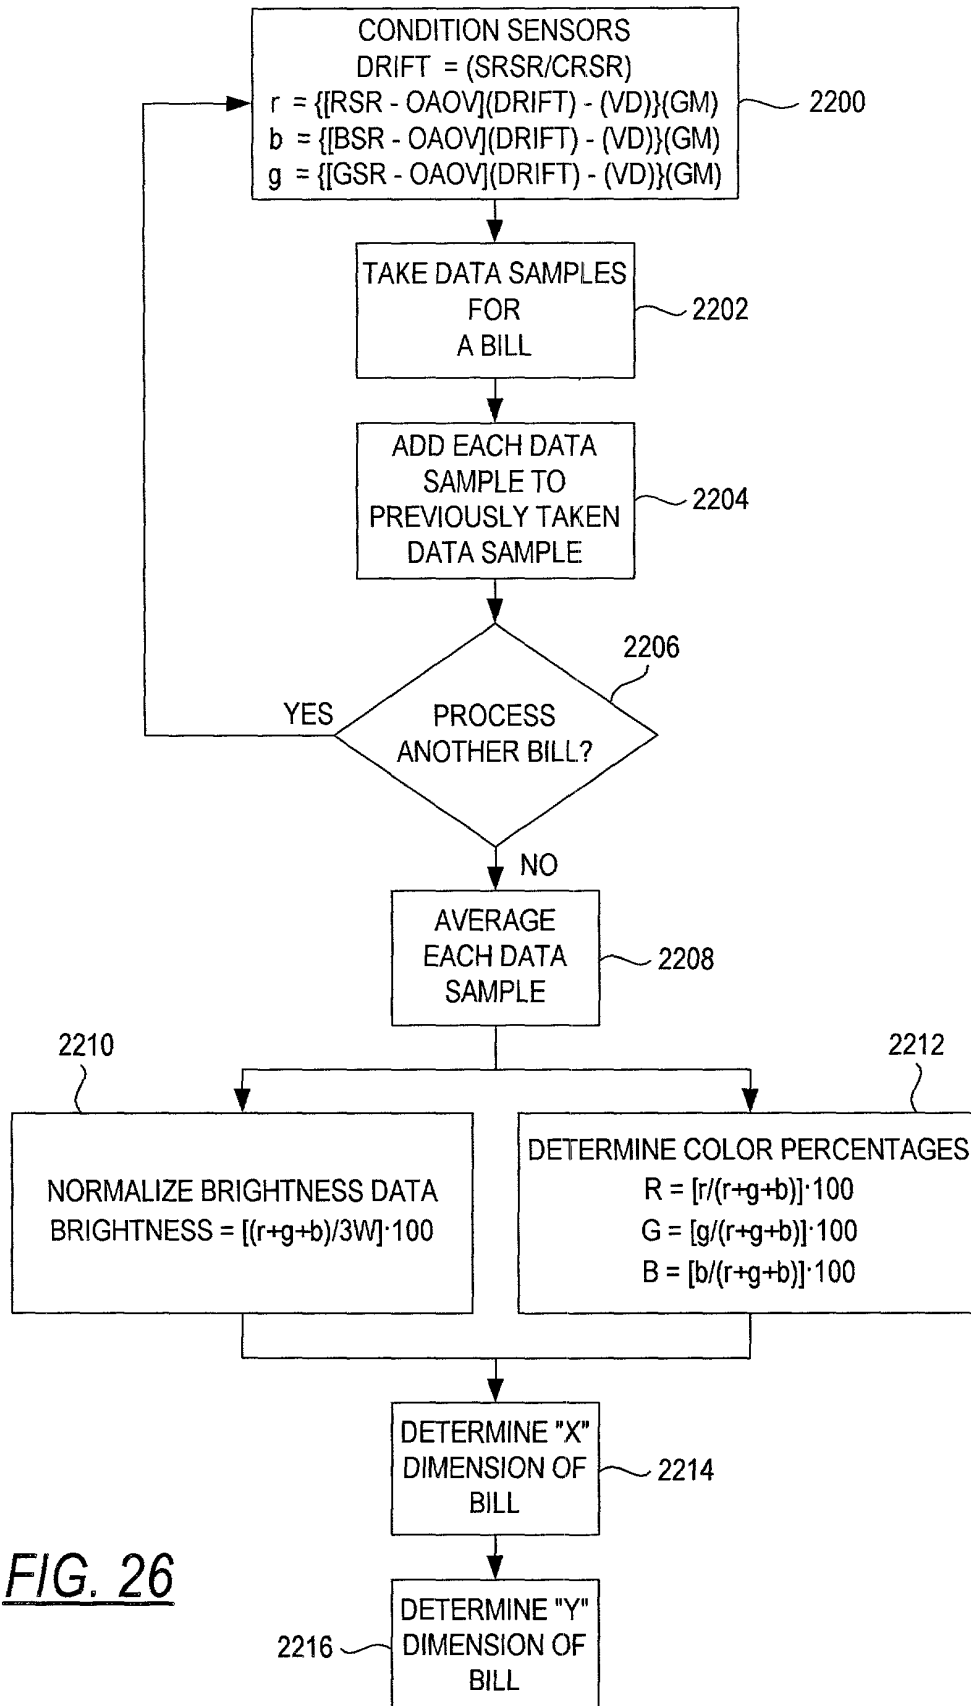


FIG. 26